









开关示意图
Switch diagram

开关说明:

- ▼ =反弹位置
- =钥匙在此位置上不可以拔出
- ⊙ =钥匙可以在此位置上拔出
- ▼或●或⊙ =停止位置

Switch description:

- ▼ =Momentary position
- =Detent position
- ⊙ =key pull possible in these positions
- ▼or●or⊙ =Stop positions

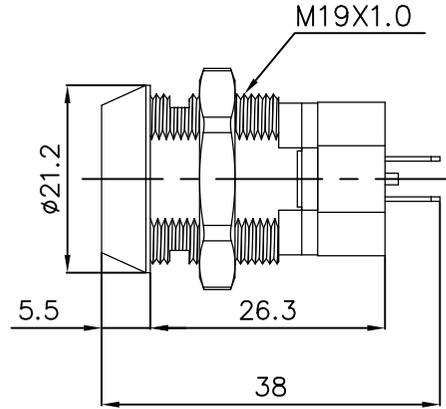

建议板孔尺寸
Recommended hole size

产品说明	主体材质:	锌合金
	表面处理:	镀铬
	钥匙:	铜管铁柄钥匙圆管钥匙, KA:206
	电讯:	4支端子, 12点 (1-2, 3-4通电)
Main material:		Zinc alloy
Surface treatment:		Chrome plating
Key:		Tubular key, Copper pipe and iron handle, KA:206
Telecom:		4 terminals, 12 o'clock (1-2, 3-4 power on)

产品品名 PRODUCT NAME	DKS004	图号 DRAW NO.	TC01-00195
未注公差系数表		制图/DRAWN	审核/CHKD
0-6	±0.1	版本/REV	第三角法
>6-30	±0.2		
>30-120	±0.3	AO	Third Angle
>120-400	±0.5		
>315-1000	±0.8		
>1000-2000	±1.2	单位 UNIT	mm
未注角度公差: ±1°			

△	
次序	更改坐标