

# DH-PFS3103-1GT1ET-60

3-Port Switch with 2-Port PoE




## Features

- Layer-two Unmanaged PoE Switch
- Conforms to IEEE802.3, IEEE802.3u and IEEE802.3X standards
- MAC auto study and aging, MAC address list capacity is 8K
- Conforms to IEEE802.3af and IEEE802.3at power supply standard. Port 2 and 3 support Hi-PoE 60W power supply
- Adopts metal structure
- High protection grade, supports common mode 4KV, differential mode 2KV
- Supports DC 48V-DC 57V power supply and dual power backup
- Supports -30°C~65°C operating temperature

## Technical Specification

|                        |                                                                               |
|------------------------|-------------------------------------------------------------------------------|
| Model                  | DH-PFS3103-1GT1ET-60                                                          |
| Ethernet Port          | 1*RJ45 10/100M (PoE)<br>1*RJ45 10/100/1000M (PoE)<br>1*SFP 100/1000M (uplink) |
| PoE Power Consumption  | Port2 and port 3 support Hi-PoE 60W<br>Totals≤60W                             |
| PoE Protocol           | IEEE802.3af, IEEE802.3at, Hi-PoE                                              |
| Switching Capacity     | 6.8Gbps                                                                       |
| Packet Forwarding Rate | 3.12Mpps                                                                      |
| Packet Buffer Memory   | 1Mb                                                                           |
| Application Humidity   | 10%~90%                                                                       |
| Power                  | DC48-57V                                                                      |
| Lightning Protection   | Common Mode 4KV<br>Differential Mode 2KV                                      |
| Working Temperature    | -30°C~65°C                                                                    |
| Dimension(W×D×H)       | 105mm x75mm x30mm                                                             |

## Dimensions (mm)

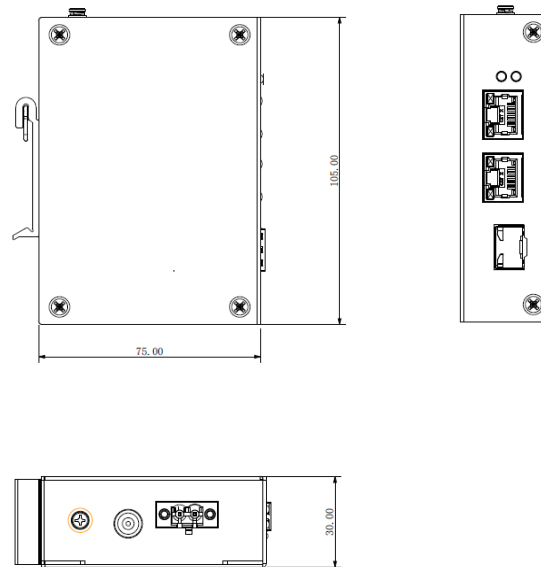

## Accessories

|         |                                        |
|---------|----------------------------------------|
| Model   |                                        |
| PFT3950 | 1.25G 850nm,500m,LC, Multi-mode        |
| PFT3960 | 1.25G 1310/1550nm,20km,LC, Single-mode |
| PFT3970 | 1.25G 1550/1310nm,20km,LC, Single-mode |