

Gigabit Industrial Switch



GS1002-4GT-60

4x10/100/1000Base-T + 2x100/1000Base-X SFP

GS1002-4GT-60 is a new generation Power over Ethernet Managed Industrial switch with 4-Port 10/100/1000Base-TX and 2-Port 100/1000Base-FX Fast SFP that provide stable and reliable Ethernet transmission, with high quality design and reliability. It is positioning in the broadband network intervention market, to offer and realize Ethernet data exchange, convergence and long-distance optical transmission with efficient bandwidth and reliable fiber optic network solutions for users. The industrial switch complies with various characteristics such as mini size, no fan, low power consumption, high reliability and stability, and easy to maintain.

With dual power input design, GS1002-4GT-60 can offer redundant mechanisms for critical applications that need always-on connections. It can also operate either at standard operating temperature range -40 to 75°C. Housed in rugged DIN rail or wall mountable IP40 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- 4x10/100/1000Base-TX RJ45 ports, 2x100/1000Base-FX Fast SFP ports
- Support Auto-MDIX, and full/half duplex self-negotiation mode
- Provide SC/LC interface fiber port, support single/dual fiber transmission
- Support 10K bytes giant frame, compatible with various extension protocol
- Support IEEE802.3az energy efficient Ethernet technology
- Electric 6KV surge protection, easy to use in outdoor environment
- Complete status indicator, working state at a glance
- Power input polarity protection design, no worry about wrong operation
- Metal case, no fan design
- Installation method: DIN rail /Wall mounting

Specification

Physical Port

RJ45 port and speed	4x10/100/1000Base-TX
Fiber port and speed	2x100/1000Base-FX SFP

Parameters

Ethernet standards	IEEE802.3 IEEE802.3u IEEE802.3z IEEE802.3ab IEEE802.3x IEEE802.3az IEEE802.3ah IEEE802.1X IEEE802.1Q
Packet buffer	1Mbits
Maximum packet length	Up to 10k Bytes
Transmission mode	Store and Forward(full/half duplex mode)
Exchange property	Delay time: < 7 μ s Backplane bandwidth: 12Gbps Packet forwarding rate: 1488100 (64Byte)

PoE (Optional)

PoE standard	8x IEEE 802.3af /IEEE 802.3at /IEEE 802.3bt PoE(Optional)
Power budget	Max. PoE output power budget 90W

LED Indicator

Power	Connect-always
RJ45	Link/Act: connect-always; data exchange-twinkle Speed light: 1000Mbps-always; 10/100Mbps-off
Fiber	Link/Act: connect-always; data

	exchange-twinkle
--	------------------

Power Information

Power access mode	Phoenix terminal, DC seat
Redundant power input	DC 9-56V
Overload protection	Yes
Power reverse	Support
Power consumption	Full-load<10W

Physical Property

Protection grade	IP40 aluminum case
Cooling mode	Natural cooling, no fan design
Dimensions	120mm x 90mm x 35mm (L x W x H)
Installation mode	DIN rail/wall-mountable
Weight	300g

Working Environment

Operating Temperature	-40°C~75°C
Operating Humidity	5%~90% non-condensing
Storage	-40°C~80°C


Warranty

MTBF	500,000 hours
Defects Liability Period	3 year warranty, lifetime technical support

Certification Standard

EMI	FCC Part15 Subpart B Class A, EN 55022 Class A
EMS	EN61000-4-2(ESD), EN61000-4-3(RS), EN61000-4-4(EFT), EN61000-4-5(Surge), EN61000-4-6(CS), EN61000-4-8, EN61000-4-11
Collision	IEC60068-2-27
Drop	IEC60068-2-32
Vibration	IEC60068-2-6
Safety grade	EN60950-1

Dimension

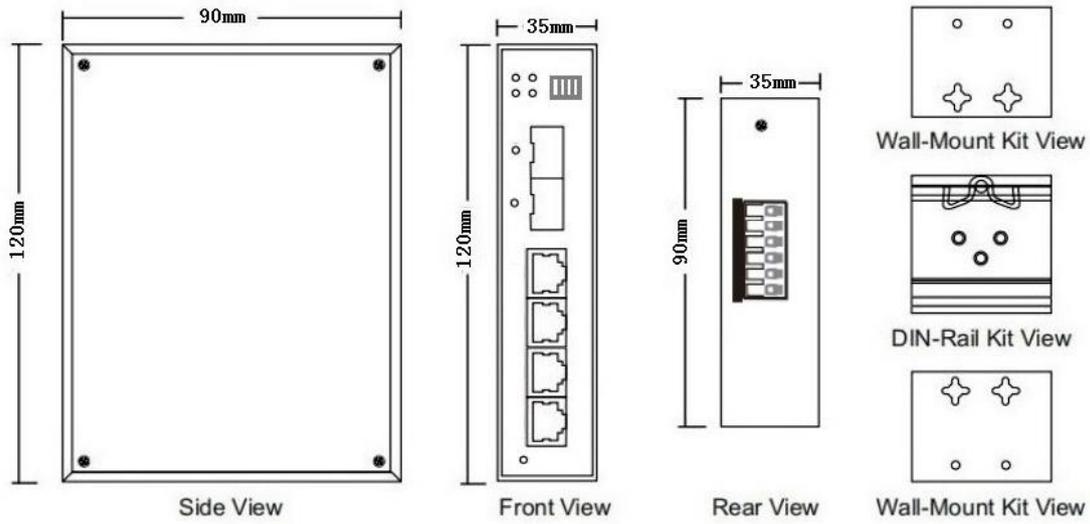

Order Information

Model Number	Port Description
GS1002-4GT-60	Gigabit Central Ethernet Switch, unmanaged, 4x10/100/1000Base-TX + 2x100/1000Base-FX SFP